Controls, C-AD 9/4/2003 9:25 AM d36-e1126_5.dwg

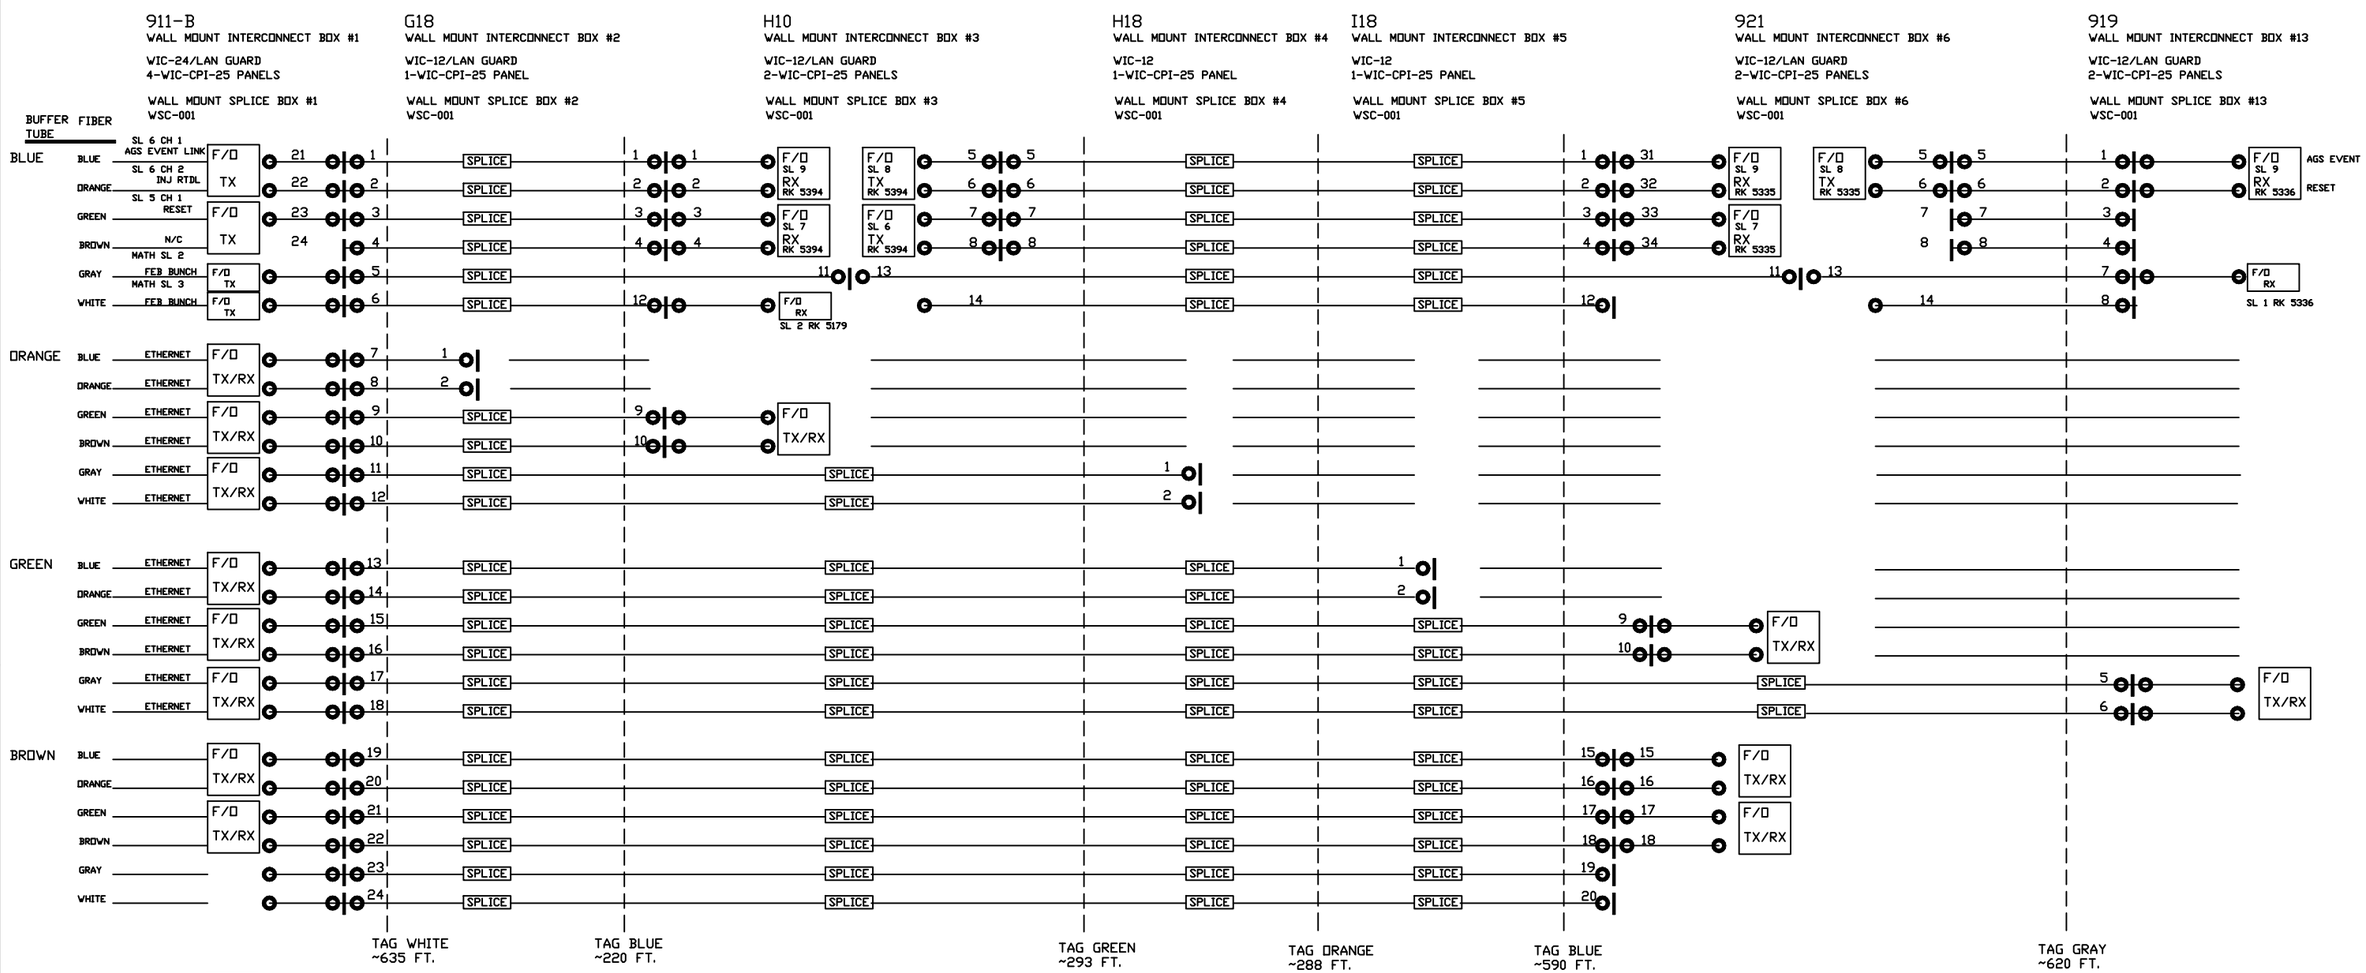

F/O TX
F/O RX
F/O TX OR RX CARD
94028164 (TX)
94028097 (RX)

CONNECTOR

F/O TX/RX — ETHERNET TRANSCEIVER

SPLICE — FUSION SPLICE

F/O TX / F/O RX — MATH ASSOC. TX OR RX

INTERBUILDING CABLE IS A 24 FIBER LOOSE TUBE ARMORED CABLE, EXCEPT 921-919 WHICH IS A 18 FIBER CABLE.

ALL CABLES ARE 62.5/125 FIBER.

REV.	ZONE	ECN NO.	DATE	BY	CKR	APP.

-3	-2	-1	REF DESIGNATOR	ITEM NO.	DESCRIPTION	MAT'L DWG NO./BNL NO.
QTY REQD						

INTERPRET IN GENERAL ACCORDANCE WITH ASME Y14.24M-1989

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

DECIMAL TOLERANCES
.X ±.030
.XX ±.015
.XXX ±.005
ANGULAR TOLERANCE ± .5°

NA FINISH — BREAK SHARP EDGES MAX. XX MIN. XX

OUTSTANDING ECN

Q.A. CATEGORY A-3

		DATE
DRAWN BY	Ed Koropsak	4/20/01
CHECKED BY	NOBODY	
DESIGN APPROVAL		
ENGINEER APPROVAL	NONE	
SUPVR. APPROVAL		

NEXT ASSEMBLY

BROOKHAVEN NATIONAL LABORATORY
UPTON, N.Y. 11973

AGS CONTROLS
FIBER OPTIC PATHS
G18 LINE

SIZE D — DRAWING NUMBER D36-E1126 — REV. A

MATERIAL: ——— SCALE: FULL WEIGHT: – SHEET 5 OF 8

*AUTOCAD